


## LED Filament A15(2W/4W)

### Description:

Efficacy: 120lm/W  
 Life Time: 25,000 HR  
 RoHS  
 UL Certification

### Replacement:

25W Incandescent Bulbs  
 40W Incandescent Bulbs

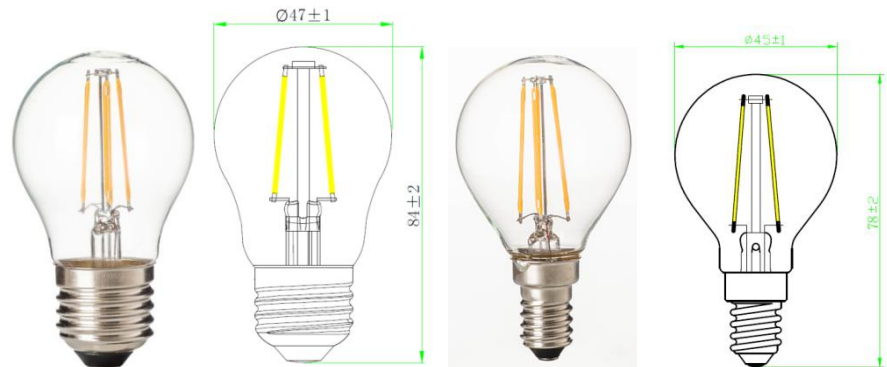


### Parameters:

Material: Glass  
 Input Voltage: 120/220VAC; 50/60Hz  
 CCT: 2700K/4000K/6000K  
 CRI: >80

View Angle: 360°  
 Power Supply: Non-Isolate Drive  
 Weight: 25g  
 Life: 25,000 hr

Part NO.	CCT	CRI	Lumen	Input Voltage	Wattage	PF	Base	Dim
BL.XXA02JLGA00U	2700K	80	220lm	90-135V/60Hz	2W	0.5	E26	NO
BL.XXA02JLGAD0U	2700K	80	220lm	120V/60Hz	2.5W	0.9	E26	YES
BL.XXB02JKGA000	2700K	80	220lm	176-264V/50Hz	2W	0.5	E27	NO
BL.XXA04JLGA00U	2700K	80	420lm	90-135V/60Hz	4W	0.5	E26	NO
BL.XXA04JLGAD0U	2700K	80	420lm	120V/60Hz	4.5W	0.9	E26	YES
BL.XXB04JKGA000	2700K	80	420lm	176-264V/50Hz	4W	0.5	E27	NO
BL.XXB04JKGAD00	2700K	80	420lm	220-230V/50Hz	4.5W	0.7	E27	YES
BL.XXA02JPCA00U	2700K	80	220lm	90-135V/60Hz	2W	0.5	E12	NO
BL.XXA02JPCAD0U	2700K	80	220lm	120V/60Hz	2.5W	0.9	E12	YES
BL.XXB02JNCA000	2700K	80	220lm	176-264V/50Hz	2W	0.5	E14	NO
BL.XXA04JPCA00U	2700K	80	420lm	90-135V/60Hz	4W	0.5	E12	NO
BL.XXA04JPCAD0U	2700K	80	420lm	120V/60Hz	4.5W	0.9	E12	YES
BL.XXB04JNCA000	2700K	80	420lm	176-264V/50Hz	4W	0.5	E14	NO
BL.XXB04JNCAD00	2700K	80	420lm	220-230V/50Hz	4.5W	0.7	E14	YES

## Packing information:

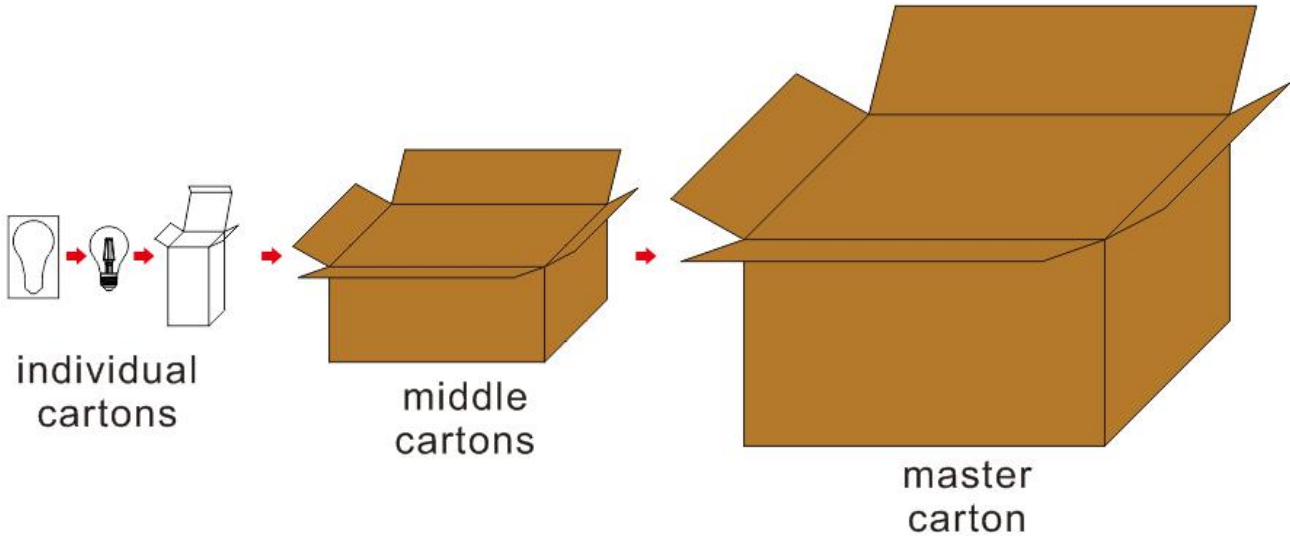

Master carton size:550\*280\*240mm, 550\*280\*290mm

Net weight:2.4kg; Gross weight:6.6kg

25 bulbs/middle carton, 4 middle cartons/master carton

## Installation:

Connect to E26/E27/E12/E14base

## Note:

1. The input voltage is 120/220VAC
2. Turn power off when install the LED filament bulbs
3. Check the bulbs and make sure it's undamaged before installation
4. LED filament bulbs are not suitable for insulated places
5. LED filament bulbs are prohibited installed outdoor place



### Description of Dimmer Matching

Our LED lights have been designed and worked with listed dimmers:

For 2W-5W

**LEVITON:**

R62-6674-P0W  
C22-6672-1LW  
R70-6631-1LW

**LUTRON:**

DV-600P-WH  
MACL-153MR-WH  
CT-600PR-WH

For >5W

**LEVITON:**

R62-6674-P0W  
R70-6631-1LW

**LUTRON:**

DV-600P-WH  
MACL-153MR-WH

**Remark:**

1. Mismatch dimmer may lead to poor lighting effect.
2. Dimming range:20%-80%.
3. For the items less than 3W, one dimmer has to be connected with more than 2pcs each time.