


LED Filament B11F(2W/4W)

Description:

Efficacy: 120lm/W
 Life Time: 25,000 HR
 RoHS
 UL Certification

Replacement:

25W Incandescent Bulbs
 40W Incandescent Bulbs

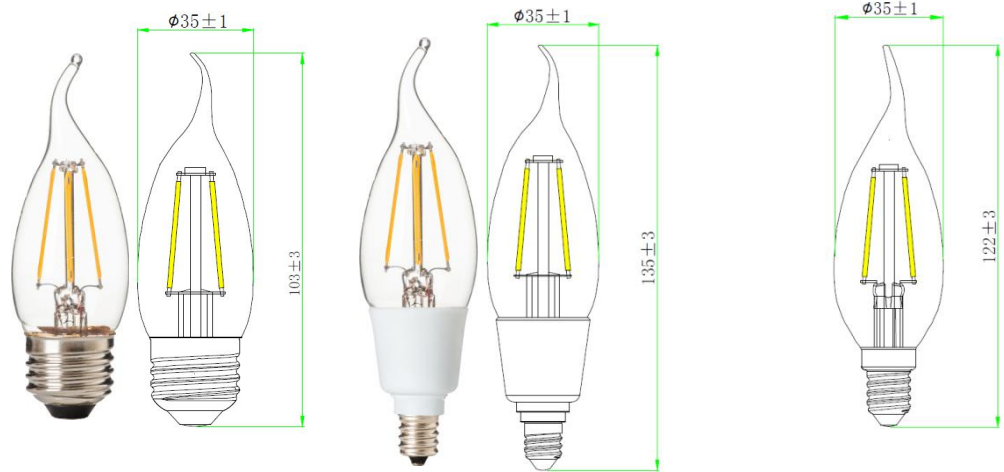


Parameters:

Material: Glass
 Input Voltage: 120/220VAC; 50/60Hz
 CCT: 2700K/4000K/6000K
 CRI: >80

View Angle: 360°
 Power Supply: Non-Isolate Drive
 Weight: 20g
 Life: 25,000 hr

Part NO.	CCT	CRI	Lumen	Input Voltage	Wattage	PF	Base	Dim
CL.XXA02JL3A00U	2700K	80	220lm	90-135V/60Hz	2W	0.5	E26	NO
CL.XXA02JL3AD0U	2700K	80	220lm	120V/60Hz	2.5W	0.9	E26	YES
CL.XXB02JK3A000	2700K	80	220lm	176-264V/50Hz	2W	0.5	E27	NO
CL.XXA04JL3A00U	2700K	80	420lm	90-135V/60Hz	4W	0.5	E26	NO
CL.XXA04JL3AD0U	2700K	80	420lm	120V/60Hz	4.5W	0.9	E26	YES
CL.XXB04JK3A000	2700K	80	420lm	176-264V/50Hz	4W	0.5	E27	NO
CL.XXB04JK3AD00	2700K	80	420lm	220-230V/50Hz	4.5W	0.7	E27	YES
CL.XXA02JP1A00U	2700K	80	220lm	90-135V/60Hz	2W	0.5	E12	NO
CL.XXA02JP1AD0U	2700K	80	220lm	120V/60Hz	2.5W	0.9	E12	YES
CL.XXB02JN1A000	2700K	80	220lm	176-264V/50Hz	2W	0.5	E14	NO
CL.XXA04JP1A00U	2700K	80	420lm	90-135V/60Hz	4W	0.5	E12	NO
CL.XXA04JP1AD0U	2700K	80	420lm	120V/60Hz	4.5W	0.9	E12	YES
CL.XXB04JN1A000	2700K	80	420lm	176-264V/50Hz	4W	0.5	E14	NO
CL.XXB04JN1AD00	2700K	80	420lm	220-230V/50Hz	4.5W	0.7	E14	YES
CL.XXB02JN3A000	2700K	80	220lm	220-230V/50Hz	2W	0.5	E14	NO
CL.XXB04JN3A000	2700K	80	420lm	220-230V/50Hz	4W	0.5	E14	NO

Packing information:

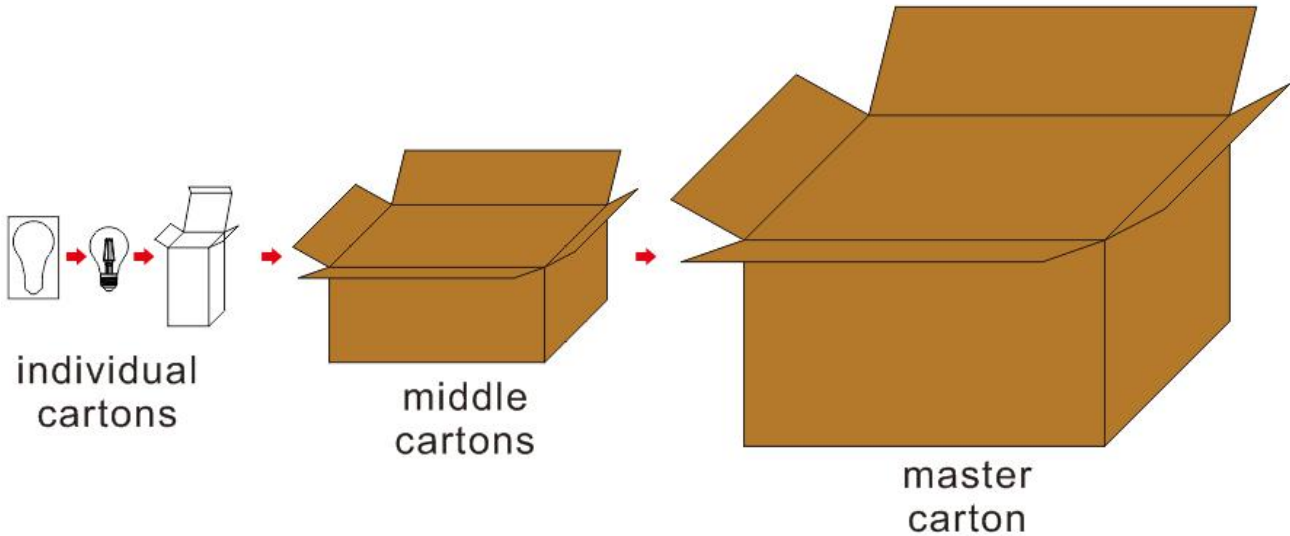

Master carton size:260*210*350mm
 Net weight:1.3kg; Gross weight:3.5kg
 15 bulbs/middle carton, 4 middle cartons/master carton

Installation:

Connect to E26/E27/E12/E14base

Note:

1. The input voltage is 120/220VAC
2. Turn power off when install the LED filament bulbs
3. Check the bulbs and make sure it's undamaged before installation
4. LED filament bulbs are not suitable for insulated places
5. LED filament bulbs are prohibited installed outdoor place



Description of Dimmer Matching

Our LED lights have been designed and worked with listed dimmers:

For 2W-5W

LEVITON:

R62-6674-P0W
 C22-6672-1LW
 R70-6631-1LW

LUTRON:

DV-600P-WH
 MACL-153MR-WH
 CT-600PR-WH

For >5W

LEVITON:

R62-6674-P0W
 R70-6631-1LW

LUTRON:

DV-600P-WH
 MACL-153MR-WH

Remark:

1. Mismatch dimmer may lead to poor lighting effect.
2. Dimming range:20%-80%.
3. For the items less than 3W, one dimmer has to be connected with more than 2pcs each time.